



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**DESCRIPTION**



**TATFLL SERIES**

The TATFLL floodlight is a versatile unit with multiple mounting options that satisfy many of your lighting applications. The TATFLL can be adjusted to almost any position to direct the light where needed.



**CONSTRUCTION**

**Housing**  
Die cast aluminum housing, with a finned heat sink designed to dissipate heat efficiently.

**Finish**  
Durable bronze powder coat paint.

**Thermal Management**  
Raised stand-offs provide even heat dissipation; requires no additional heat sinking


**Lens Type**  
Clear Pattern polycarbonate Lens

**Mounting**  
Yoke mount or knuckle mount

**Listings**  
UL listed to US safety standards. Suitable for wet locations. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

**Warranty**  
5-year limited warranty.

**LINE DRAWING**

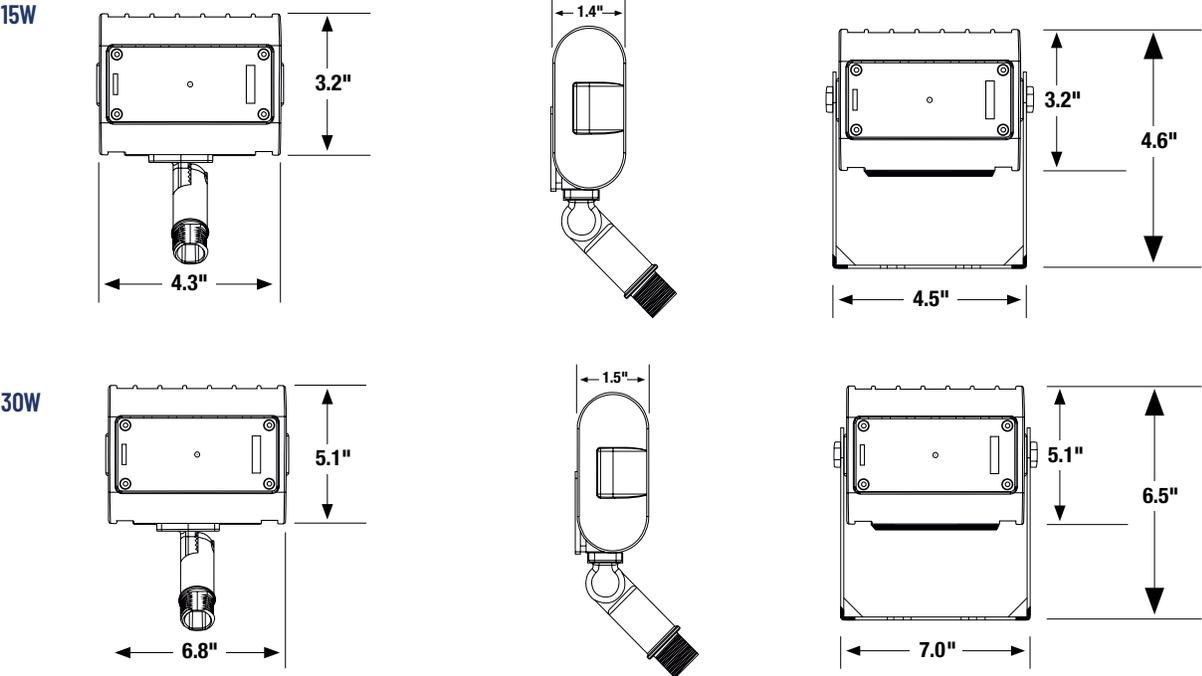




CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

## LINE DRAWING

50W

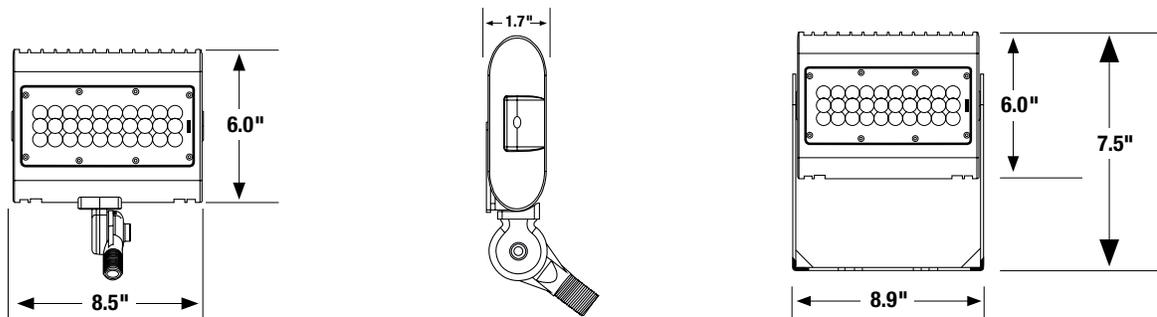

## PERFORMANCE SPECIFICATIONS

	15W	30W	50W
Input Voltage	100-277VAC	100-277VAC	100-277VAC
Frequency	50/60Hz	50/60Hz	50/60Hz
Input Current	0.18A MAX	0.35A MAX	0.6A MAX
Input Wattage	15W	29.5W	48.1W
Power Factor	>0.90	>0.90	>0.90
Efficacy	126 LM/W	133 LM/W	132 LM/W
LED Efficacy	120 LM/W	120 LM/W	120 LM/W
Lumens	1863Lm	3973Lm	6219Lm
Color Temp	5000K	5000K	5000K
Lifespan	50000Hrs.	50000Hrs.	50000Hrs.
CRI	>80	> 80	> 80
Beam Angle	120 X 90°	120 X 90°	120 X 90°
Operating Temp	-20°C- +40°C	-20°C- +40°C	0°C- +40°C
Ambient Temperature	-35°C (-31°F) -50°C (122°F)		
Driver Efficiency	88%	88%	88%



CONTRACTOR:	
PROJECT:	DATE:
PREPARED BY:	MODEL#:

**ORDERING INFO**

EXAMPLE: TATFLL3015BZK

SERIES	COLOR TEMP.	LAMP WATTAGE	FINISH	MOUNTING
TATFLL	[30] : 3000K	[15] : 15 WATTS [30] : 30 WATTS	[BZ] : BRONZE [WH] : WHITE	[K] : 1/2" KNUCKLE MOUNT
	[40] : 4000K	[15] : 15 WATTS [30] : 30 WATTS [50] : 50 WATTS	[BZ] : BRONZE	[K] : 1/2" KNUCKLE MOUNT
	[50] : 5000K	[15] : 15 WATTS [30] : 30 WATTS [50] : 50 WATTS	[BZ] : BRONZE [WH] : WHITE*	[BLANK] : YOKE MOUNT [K] : 1/2" KNUCKLE MOUNT*

\* Not Available on 30W @ 5000K